Shelleymatic®

PROJECT	
ITEM #	
QUANTITY	DATE
APPROVAL	

N6/N10/N14

Free-Standing Self-Contained Milk Or Beverage Dispensers

Short Form Specifications

Exterior sides shall be 20-gauge stainless steel. Top and corner supports shall be 16-gauge stainless steel, welded, ground and polished into one integral unit. Inner liner shall be water-tight and constructed of 22-gauge stainless steel with a 1.25" (3.2cm) I.P.S. drain. Unit shall be insulated with high-density, foamed-in-place polyurethane insulation with a non-conductive top breaker strip.

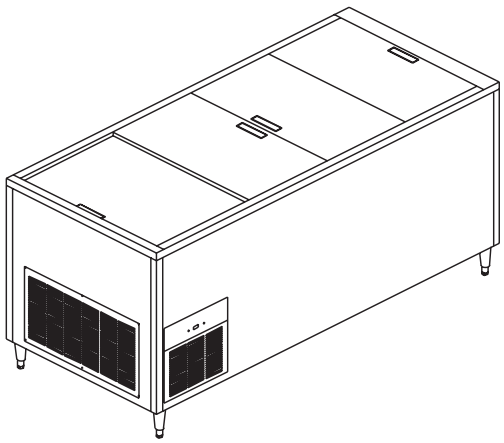

Refrigerated compartment is equipped with drain plumbed to a drain valve locaed at the bottom of the counter.

Each opening shall have a stainless steel sliding lid recessed handles.

(3) stainless steel louvers shall be installed in the end and sides of the cabinet to allow proper air flow to the condensing unit.

Each self-leveling mechanism shall be field adjustable by adding or removing stainless steel extension springs in the elevator housing inside the unit. The elevators shall be connected by removable platform carriers constructed of 18-gauge stainless steel.

NOTE: See chart on back for crate storage capacity.

Refrigeration system shall use HFC-134a refrigerant. Refrigerant flow shall be controlled by an expansion valve. Cabinet shall maintain 36°F to 40°F (2°C to 4°C) temperature with lids closed for storage.
Refrigeration system shall be controlled by a pressure control, located near the condensing unit.

Electrical connections shall be 115 volt, 60 cycle, single phase. Unit shall have a 9' (2.7m) long electrical cord and NEMA 5-15P plug. Exterior has an ON/OFF switch. Unit shall be mounted on 6.00" (15.2cm) high adjustable stainless steel legs.

Optional Accessories and Modifications

- 4.00" (10.2cm) diameter swivel casters (two locking) with corner bumpers (adds 2.50" (6.4cm) to overall length and depth and reduces overall height by 1.00" (2.5cm)
- Heavy-duty casters (contact factory)
- Corner bumpers (adds 2.50" [6.4cm] to overall length and depth)
- Wrap-around bumpers (adds 1.75" [4.4cm] to overall length and depth)
- Laminate panels
- Fiberglass panels
- Lid locking device
- Special voltages (consult factory)
- Dial or digital style thermometer

NOTE: This equipment is intended for storage and /or display of pre-packaged or bottled products only.

Model N6/N10/N14
refrigerated dispensers
use HFC-134a refrigerant.

134a REFRIGERANT c UL NSF UL

The Delfield Company, 980 S. Isabella Rd., Mt. Pleasant, MI 48858, U.S.A. • (800) 733-8821 • Fax (800) 669-0619 • www.delfield.com
Delfield reserves the right to make changes in design or specifications without prior notice. ©2003 The Delfield Company. All rights reserved. Printed in U.S.A.



PLAN VIEW
MODEL N6-1331-34
& N6-1331-37

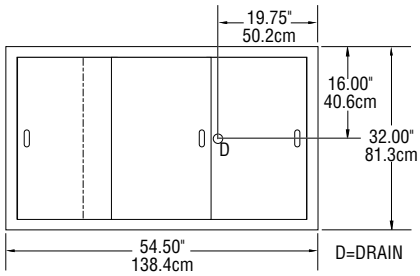

PLAN VIEW
MODEL N10-1331-34
& N10-1331-37

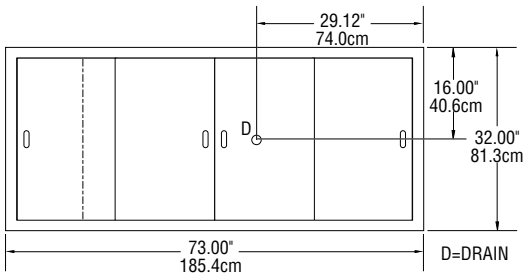

PLAN VIEW
MODEL N14-1331-34
& N14-1331-37



ELEVATION VIEW
MODEL N6-1331-34
& N6-1331-37



ELEVATION VIEW
MODEL N10-1331-34
& N10-1331-37

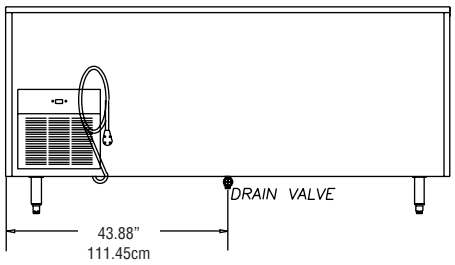

ELEVATION VIEW
MODEL N14-1331-34
& N14-1331-37



END VIEW
ALL N6/N10/N14 MODELS

Drain valve with garden hose hookup.

Mechanical Data–Standard Unit

MODEL NUMBER HEIGHT	UNIT HEIGHT	CRATE CAPACITY	HP	AMPS	BTU LOAD	BTU CAPACITY	SHIP WEIGHT
N6-1313-34	34" (83.8cm)	6	1/4	5.0	250	1170	382 lbs/ 173 kg
N6-1313-37	37" (94cm)	6	1/4	5.0	250	1170	402 lbs/ 182 kg
N10-1313-34	34" (83.8cm)	10	1/4	5.0	350	1320	545 lbs/ 247 kg
N10-1313-37	37" (94cm)	10	1/4	5.0	350	1320	565 lbs/ 256 kg
N14-1313-34	34" (83.8cm)	14	1/4	5.0	460	1420	650 lbs/ 295 kg
N14-1313-37	37" (94cm)	14	1/4	5.0	460	1420	670 lbs/ 304 kg

The Delfield Company, 980 S. Isabella Rd., Mt. Pleasant, MI 48858, U.S.A. • (800) 733-8821 • Fax (800) 669-0619 • www.delfield.com
Delfield reserves the right to make changes in design or specifications without prior notice. ©2003 The Delfield Company. All rights reserved. Printed in U.S.A.